



## **Applied Comfort 44" EA Replacement PTAC**

**New High Performance Design for 2012**

### **Features**



- **Energy Efficient** - 12 and 15 kBTU qualified for new construction. Performance verified by 3rd party lab
- **Quiet** - Acoustic noise canceling materials and optimized fan designs
- **Performance** - Superior hi static pressure blower designs. Premium UL Category 1 components for reliability and durability.
- **Easy Installation** - EXACT replacement, no sleeve or louver modifications. Works with existing EA front panel.
- **Electronic Touchpad Controls** - Optional electronic controls. Remote stat and EMS ready out of the box.
- **Accessories** - Full range of accessories including sleeves, front covers, and louvers.

### **Direct replacement for:**

- McQuay EA/MEA/PMES/PDAE
- Islandaire ED
- Retroaire RC/RH 35
- Simon-Aire SSEA
- Coldpoint EA
- Ice Air RSEA
- Most other 44+PTAC units

**More information at  
[www.airdistributors.com](http://www.airdistributors.com)**



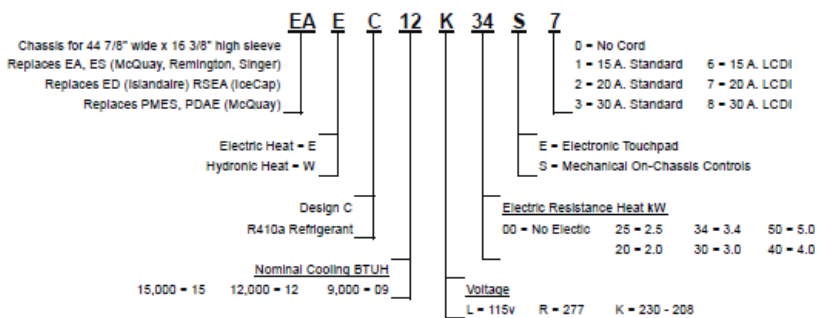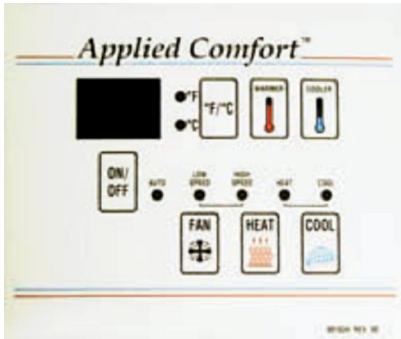

**EAEC Air Conditioner with Electric Resistance Heat**

Model	Voltage	Hz	Cooling					Resistance Heat			Min. Circuit Amps	MOP* Fuse Amps	Electrical Plug (NEMA)	Indoor CFM HIGH <sup>2</sup>	Indoor CFM LOW <sup>2</sup>	Net Wt. lbs.	Ship Wt. lbs.
			BTUHr.	EER	Amps	3/T	Pts./hr.	BTUHr.	KW	Amps							
EAEC09L00	115	60	9300	10.1	7.5	75	2.0	N/A	N/A	N/A	15.6	20	#5-20P	300	240	134	152
EAEC12L00	"	"	12500	10.1	10.8	71	3.2	N/A	N/A	N/A	19.4	20	#5-20P	330	250	"	"
EAEC09K00	230 - 208	"	9300	10.1	4.2	75	2.0	N/A	N/A	N/A	7.3	15	#6-15P	300	240	"	"
EAEC09K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC09K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC09K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC12K00	"	"	12500	10.1	5.9	71	3.2	N/A	N/A	N/A	9.5	15	#6-15P	330	250	"	"
EAEC12K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC12K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC12K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC15K00	"	"	15000	9.7	7.5	65	4.8	N/A	N/A	N/A	11.6	15	#6-15P	"	"	"	"
EAEC15K25	"	"	"	"	"	"	"	8900/7500	2.5/2.1	11.6/10.5	14.3	15	"	"	"	"	"
EAEC15K34	"	"	"	"	"	"	"	12000/9300	3.4/2.8	15.5/14.1	19.1	20	#6-20P	"	"	"	"
EAEC15K50	"	"	"	"	"	"	"	17500/13300	5.0/4.1	22.5/20.4	27.8	30	#6-30P	"	"	"	"
EAEC09R00	277	"	9300	10.1	3.2	75	2.0	N/A	N/A	N/A	7	15	#7-20P	300	240	"	"
EAEC09R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC09R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC09R40	"	"	"	"	"	"	"	14000	4.0	15.2	19.4	20	"	"	"	"	"
EAEC12R00	"	"	12700	10.1	5	71	3.2	N/A	N/A	N/A	8.2	15	"	330	250	"	"
EAEC12R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC12R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC12R40	"	"	"	"	"	"	"	14000	4.0	15.2	19.4	20	"	"	"	"	"
EAEC15R00	"	"	15300	9.7	6.3	65	4.8	N/A	N/A	N/A	10.1	15	"	"	"	"	"
EAEC15R20	"	"	"	"	"	"	"	7200	2.0	8.0	10	15	"	"	"	"	"
EAEC15R30	"	"	"	"	"	"	"	10600	3.0	11.6	14.8	15	"	"	"	"	"
EAEC15R40	"	"	"	"	"	"	"	14000	4.0	15.2	19.4	20	"	"	"	"	"

\*Time Delay Fuse or HCAR Circuit Breaker — \*Dry Coil — 277v models have non-LCDI cords.

**EAWC Air Conditioner with Hydronic Heat**

Model	Voltage	Hz	Cooling					Resistance Heat			Min. Circuit Amps	MOP* Fuse Amps	Electrical Plug (NEMA)	Indoor CFM HIGH <sup>2</sup>	Indoor CFM LOW <sup>2</sup>	Net Wt. lbs.	Ship Wt. lbs.
			BTUHr.	EER	Amps	3/T	Pts./hr.	BTUHr.	KW	Amps							
EAWC09L00	115	60	9300	10.1	4.5	75	2.0	N/A	N/A	N/A	15.6	20	#5-15P	300	240	134	152
EAWC12L00	"	"	13200	10.1	11.6	"	"	N/A	N/A	N/A	19.4	20	#5-20P	330	250	"	"
EAWC09K00	230 - 208	"	9300	10.1	4.5	71	3.2	N/A	N/A	N/A	7.3	15	#6-15P	300	240	"	"
EAWC12K00	"	"	12700	10.1	5.8	"	"	N/A	N/A	N/A	9.5	15	#6-15P	330	250	"	"
EAWC15K00	"	"	15300	9.7	7.3	"	"	N/A	N/A	N/A	11.6	15	#6-15P	"	"	"	"
EAWC09R00	277	"	9300	10.1	3.9	65	4.8	N/A	N/A	N/A	7	15	#7-20P	300	240	"	"
EAWC12R00	"	"	12700	10.1	5	"	"	N/A	N/A	N/A	8.2	15	#7-20P	330	250	"	"
EAWC15R00	"	"	15300	9.7	6.3	"	"	N/A	N/A	N/A	10.1	15	#7-20P	"	"	"	"

\*Time Delay Fuse or HCAR Circuit Breaker — \*Dry Coil — 277v models have non-LCDI cords.

**Air Distributors Company, Inc.**  
 13005 Middletown Industrial Blvd  
 Suite L  
 Louisville, KY 40223  
 800-866-1210  
 www.airdistributors.com

