

FEATURES

- 5/8" Screw Diameter
- 0.10" to .375" Leads
- Available in Left and Right Hand Threads
- Dynamic Loads up to 350 lbs
- Static Loads up to 1,750 lbs
- Standard with a Plastic Nut
- Bronze and Custom Nut Types Available Upon Request
- Custom Screw Machining Available Upon Request



DESCRIPTION


Lead screws are cost-effective and self-locking\* (do not require a braking system), and provide the accuracy and repeatability required by most mechanical design applications. The SF, ST, AF, and AT Series Lead Screws have a diameter of 1/8" to 1.00" with a .024" to 3.0" lead.

The ends of the screw can be customized per your drawing. Please contact Anaheim Automation to discuss your specific requirements.

\*Self locking will require an efficiency lower than 35%



PART NUMBER LAYOUT

# LSC-AAH-625-SFR-3750-06-RA-T-XX

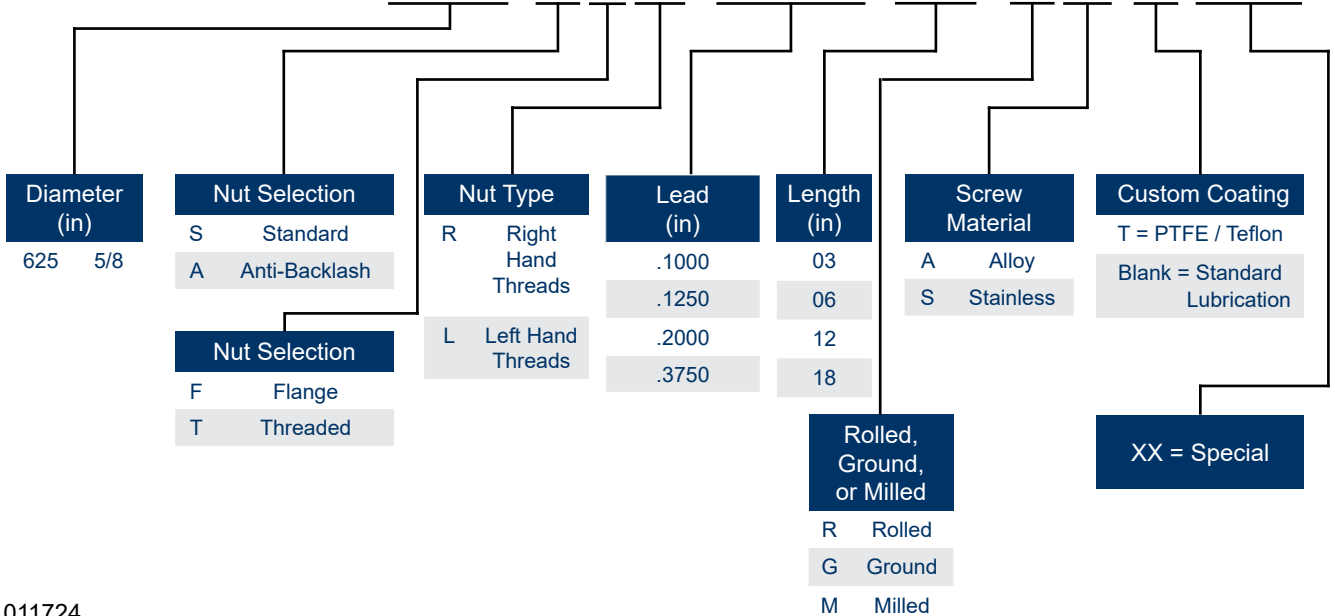

L011724

## STANDARD THREADED NUT

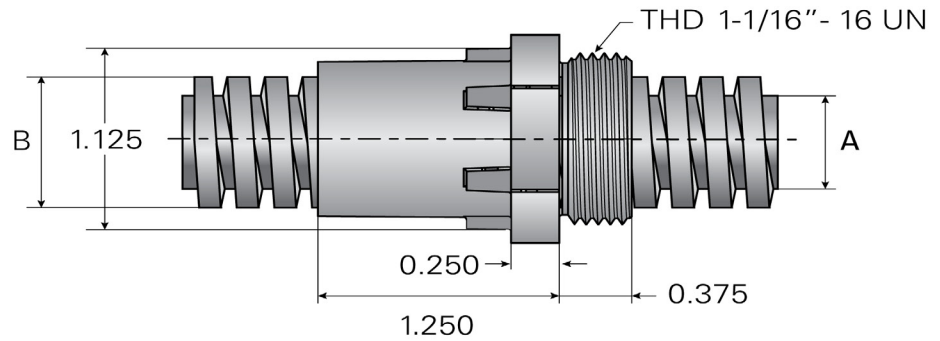



Units are in inches

Screw Diameter (in)	Lead (in)	% Efficiency	Torque* (in-lb)	"A" Root Diameter (in)	"B" Outside Diameter (in)	Weight Per Foot (oz)	Coefficient of Friction (f)	Load Capacity (lb)	
								Dynamic	Static
5/8	0.1000	28-35	0.055	0.516	0.625	12.6	0.15	350	1750
	0.1250	32-40	0.069	0.457		13.2			
	0.2000	41-51	0.101	0.484		12.6			
	0.3750	53-66	0.061	0.457		12.1			

\* Torque required to raise 1lb.

\*PLEASE NOTE - Each standard lead screw includes one nut. Additional nuts will be considered a custom request, and will require creation of a special part number.

## STANDARD FLANGED NUT

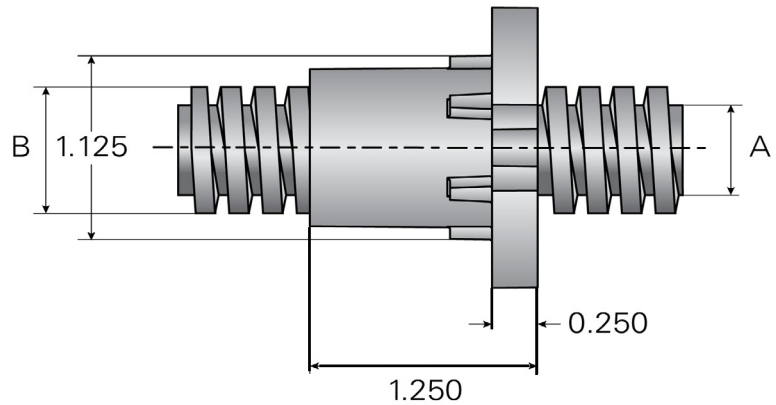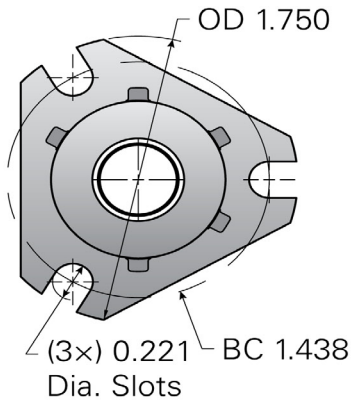

Units are in inches



Screw Diameter (in)	Lead (in)	% Efficiency	Torque* (in-lb)	"A" Root Diameter (in)	"B" Outside Diameter (in)	Weight Per Foot (oz)	Coefficient of Friction (f)	Load Capacity (lb)	
								Dynamic	Static
5/8	0.1000	28-35	0.055	0.516	0.625	12.6	0.15	250	1250
	0.1250	32-40	0.069	0.457		13.2			
	0.2000	41-51	0.101	0.484		12.6			
	0.3750	53-66	0.061	0.457		12.1			

\* Torque required to raise 1lb.

\*PLEASE NOTE - Each standard lead screw includes one nut. Additional nuts will be considered a custom request, and will require creation of a special part number.

### ANTI-BACKLASH THREADED NUT

Preload Force (lb)	
Low Force Spring	1.75 - 4.0
High Force Spring	3.75 - 9.5

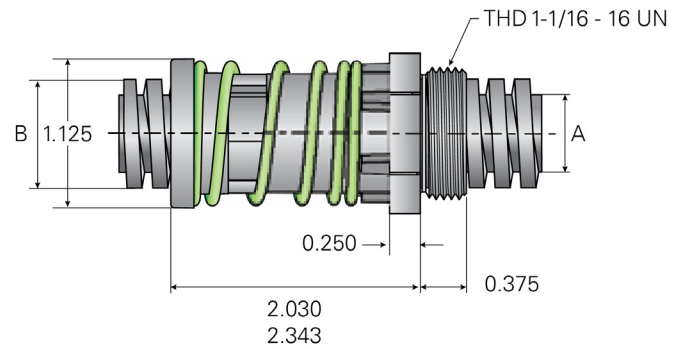



Units are in inches

Screw Diameter (in)	Lead (in)	% Efficiency	Torque* (in-lb)	"A" Root Diameter (in)	"B" Outside Diameter (in)	Weight Per Foot (oz)	Drag Torque (oz-in)	Load Capacity (lb)	
								Dynamic	Static
5/8	0.1000	28-35	0.055	0.516	0.625	12.5	3 to 7	350	1750
	0.1250	32-40	0.069	0.457		13.2			
	0.2000	41-51	0.101	0.484	12.5				
	0.3750	53-66	0.061	0.457	12.1				

\* Torque required to raise 1lb.

\*PLEASE NOTE - Each standard lead screw includes one nut. Additional nuts will be considered a custom request, and will require creation of a special part number.

### ANTI-BACKLASH FLANGED NUT

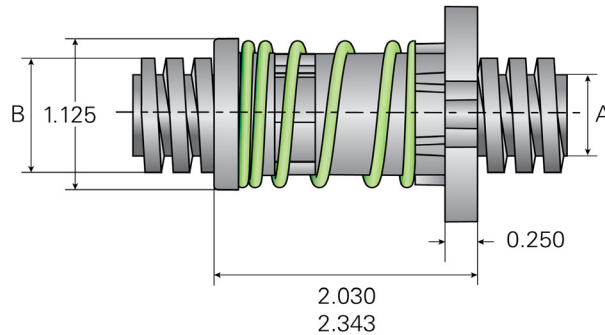

Preload Force (lb)	
Low Force Spring	1.75 - 4.0
High Force Spring	3.75 - 9.5

Units are in inches

Screw Diameter (in)	Lead (in)	% Efficiency	Torque* (in-lb)	"A" Root Diameter (in)	"B" Outside Diameter (in)	Weight Per Foot (oz)	Drag Torque (oz-in)	Load Capacity (lb)	
								Dynamic	Static
5/8	0.1000	28-35	0.055	0.516	0.625	12.5	3 to 7	250	1250
	0.1250	32-40	0.069	0.457		13.2			
	0.2000	41-51	0.101	0.484		12.5			
	0.3750	53-66	0.061	0.457		12.1			

\* Torque required to raise 1lb.

\*PLEASE NOTE - Each standard lead screw includes one nut. Additional nuts will be considered a custom request, and will require creation of a special part number.

**TORQUE, ROTARY LINEAR**

Drive on the shaft to move the nut, or drive on the nut to move the shaft.

$$\text{Torque (oz-in)} = \frac{(\text{Load oz}) (\text{Lead inch})}{(2 \pi) (\text{Efficiency})}$$

**EFFICIENCY**

$$\% \text{ efficiency} = \frac{\tan (\text{pitch angle})}{\tan [\text{pitch angle} + \arctan(f)]} \times 100$$

f = coefficient of friction